

NOTE:-



1. FOR THE SCHEMATIC DETAIL REFER DRAWING NUMBER: L01-H01D02-WSP-75-ZZ-MUP-IC-60601

General Notes
1. This drawing represents WSP design intent only.
2. This drawing must be read in conjunction with the WSP specification and schedules and relevant architectural, structural and MEP drawings.
3. Any discrepancy in or between the drawings, specifications and schedules must be brought to the attention of Engineer prior to undertaking any works.
4. All other services shown are purely indicative and must be verified and coordinated by qualified agencies prior to the commencement of any work on site.
5. All dimensions shown are in millimeters and do not take into account applied finishes unless specifically indicated otherwise. Only figured dimensioned to be followed. Do not scale.
6. For setting out information refer to the architectural drawings. Do not set out from this drawing.
7. The Contractor shall submit coordinated shop drawings for approval (based on site dimensions) prior to commencement of any work or placing of any order and or manufacture of any fittings, fixtures and components shown. The Contractor shall only work from coordinated and approved shop drawings.
8. All materials shall be approved by the Engineer/Architect prior to undertaking any works.

T1	07/11/2024	ISSUED FOR TENDER	NQ
TO	26/10/2023	ISSUED FOR TENDER	AK
Rev.	Date	Reason For Issue	CH

CONSTRUCTION PROCUREMENT

Key Plan:

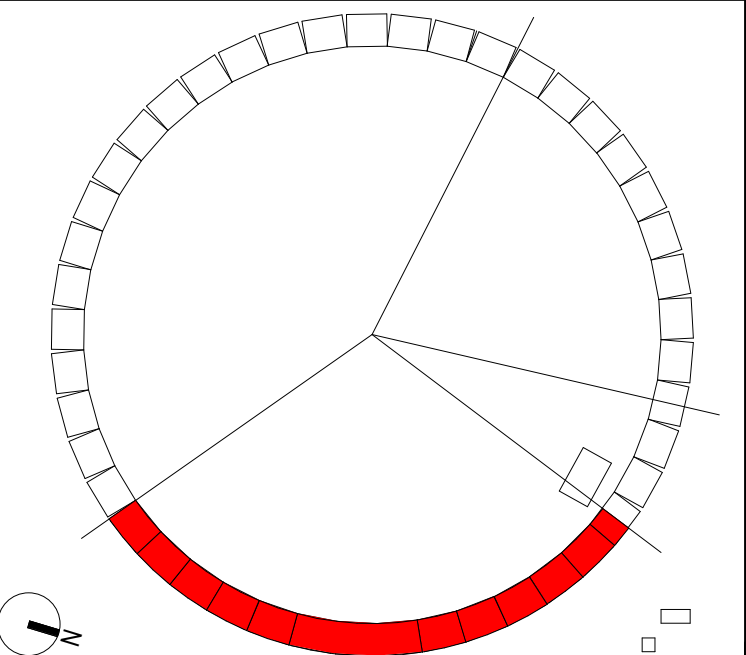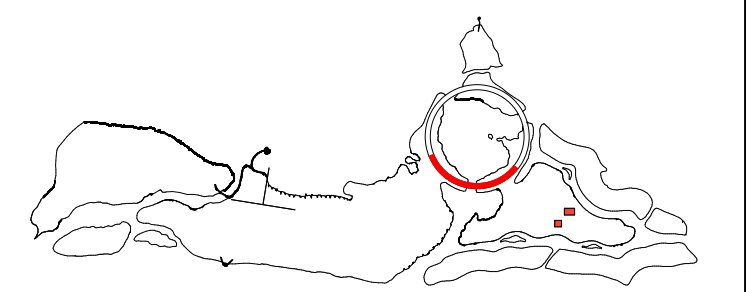

Consultant
wsp
P.O. Box 7457 Dubai, U.A.E
Tel: +971 4 523 1999 Fax: +971 4 523 1998
http://www.wsp.com

Executive Architect/ AOR
Licence number: - 101042018
Dewan
Architects +
Engineers
Osaka District
Riyadh 15025, K.S.A.
T: +966 9200 28750
F: +966 9200 28750
ryadh@dewan-architects.com

Signature Design Architect
Foster + Partners
© Foster + Partners 2022
Riverside, 22 Heister Road
London SW11 4AN
T: +44(0)20 7738 0455
F: +44(0)20 7738 1107
london@fosterandpartners.com
www.fosterandpartners.com

Client
Red Sea Global

Project
**Laheq Island
L01 The Ring
Marina Hotel**

Drawing Title
**Mock-up Room
GRMS Layout**


Model File Reference L01-H01D02-WSP-75-XX-MOD-CS-06791		
Drawn By	Checked By	Approved By
SS	AA	NQ
Project No L01H01	Issue Date 26/10/2023	Scale at ISO A0 1:50
Drawing Number L01-H01D02-WSP-75-XX-MUP-IC-80301	Revision T1	

GRMS - LEGEND

NO	LEGEND	DESCRIPTION
1	GRMS W [IP] 01	EXTERNAL ROOM ENTRY CORRIDOR STATUS INDICATION PANEL IP-EXTERNAL CONTROL PANEL - DND - BELL - MUR
2	GRMS W [CP] 01	CONTROL PANEL -TYPE 1 CP-01-ENTRANCE CONTROL PANEL - MASTER - DAY SCENE - NIGHT SCENE - DND - SERVICE
3	GRMS W [CP] 02	CONTROL PANEL -TYPE 2 CP-02-BATHROOM CONTROL PANEL - BATHTUB - VANITY - WC - SHOWER
4	GRMS W [CP] 04	CONTROL PANEL -TYPE 4 CP-04-BEDSIDE CONTROL PANEL LEFT - MASTER ON - DRAPES - SCENE 1 - SCENE 2 - SCENE 3 - DND
5	GRMS W [CP] 05	CONTROL PANEL -TYPE 5 CP-05 - BEDSIDE CONTROL PANEL RIGHT - MASTER ON - DRAPES - SCENE 1 - SCENE 2 - SCENE 3 - DND
6	GRMS W [CP] 06	CONTROL PANEL -TYPE 6 CP-06 - TERRACE CONTROL PANEL - MASTER ON - SCENE 1 - SCENE 2 - SCENE 3 - TERRACE(HIGH/OFF) - MASTER OFF
7	GRMS W [TH] 01	TH-01-THERMOSTAT - OFF / AUTO - TEMPERATURE UP - TEMPERATURE DOWN - FAN SPEED (LOW/MED/HIGH/OFF) WITH INTEGRATED - AIR QUALITY MONITORING
8	GRMS C [OS] 01	OCCUPANCY SENSOR - DUAL TECHNOLOGY(PASSIVE INFRARED AND ULTRASONIC)
9	GRMS F [MC] 01	DOOR MAGNETIC CONTACT
10	GRMS W [BC] 01	BELLCHIME
11	GRMS F [WOL] 01	WIRELESS DOOR LOCK WITH BLE/ZIGBEE COMMUNICATION
12	GRMS D [TP] 01	WIRELESS TABLET GUEST ROOM AUTOMATION CONTROL TABLET, SUCH AS AN IPAD.

MOUNTING ABBREVIATION

S.N.	SYMBOL	MOUNTING TYPE
1	C	CEILING
2	D	DESK/TABLE
3	F	FURNITURE
4	W	WALL

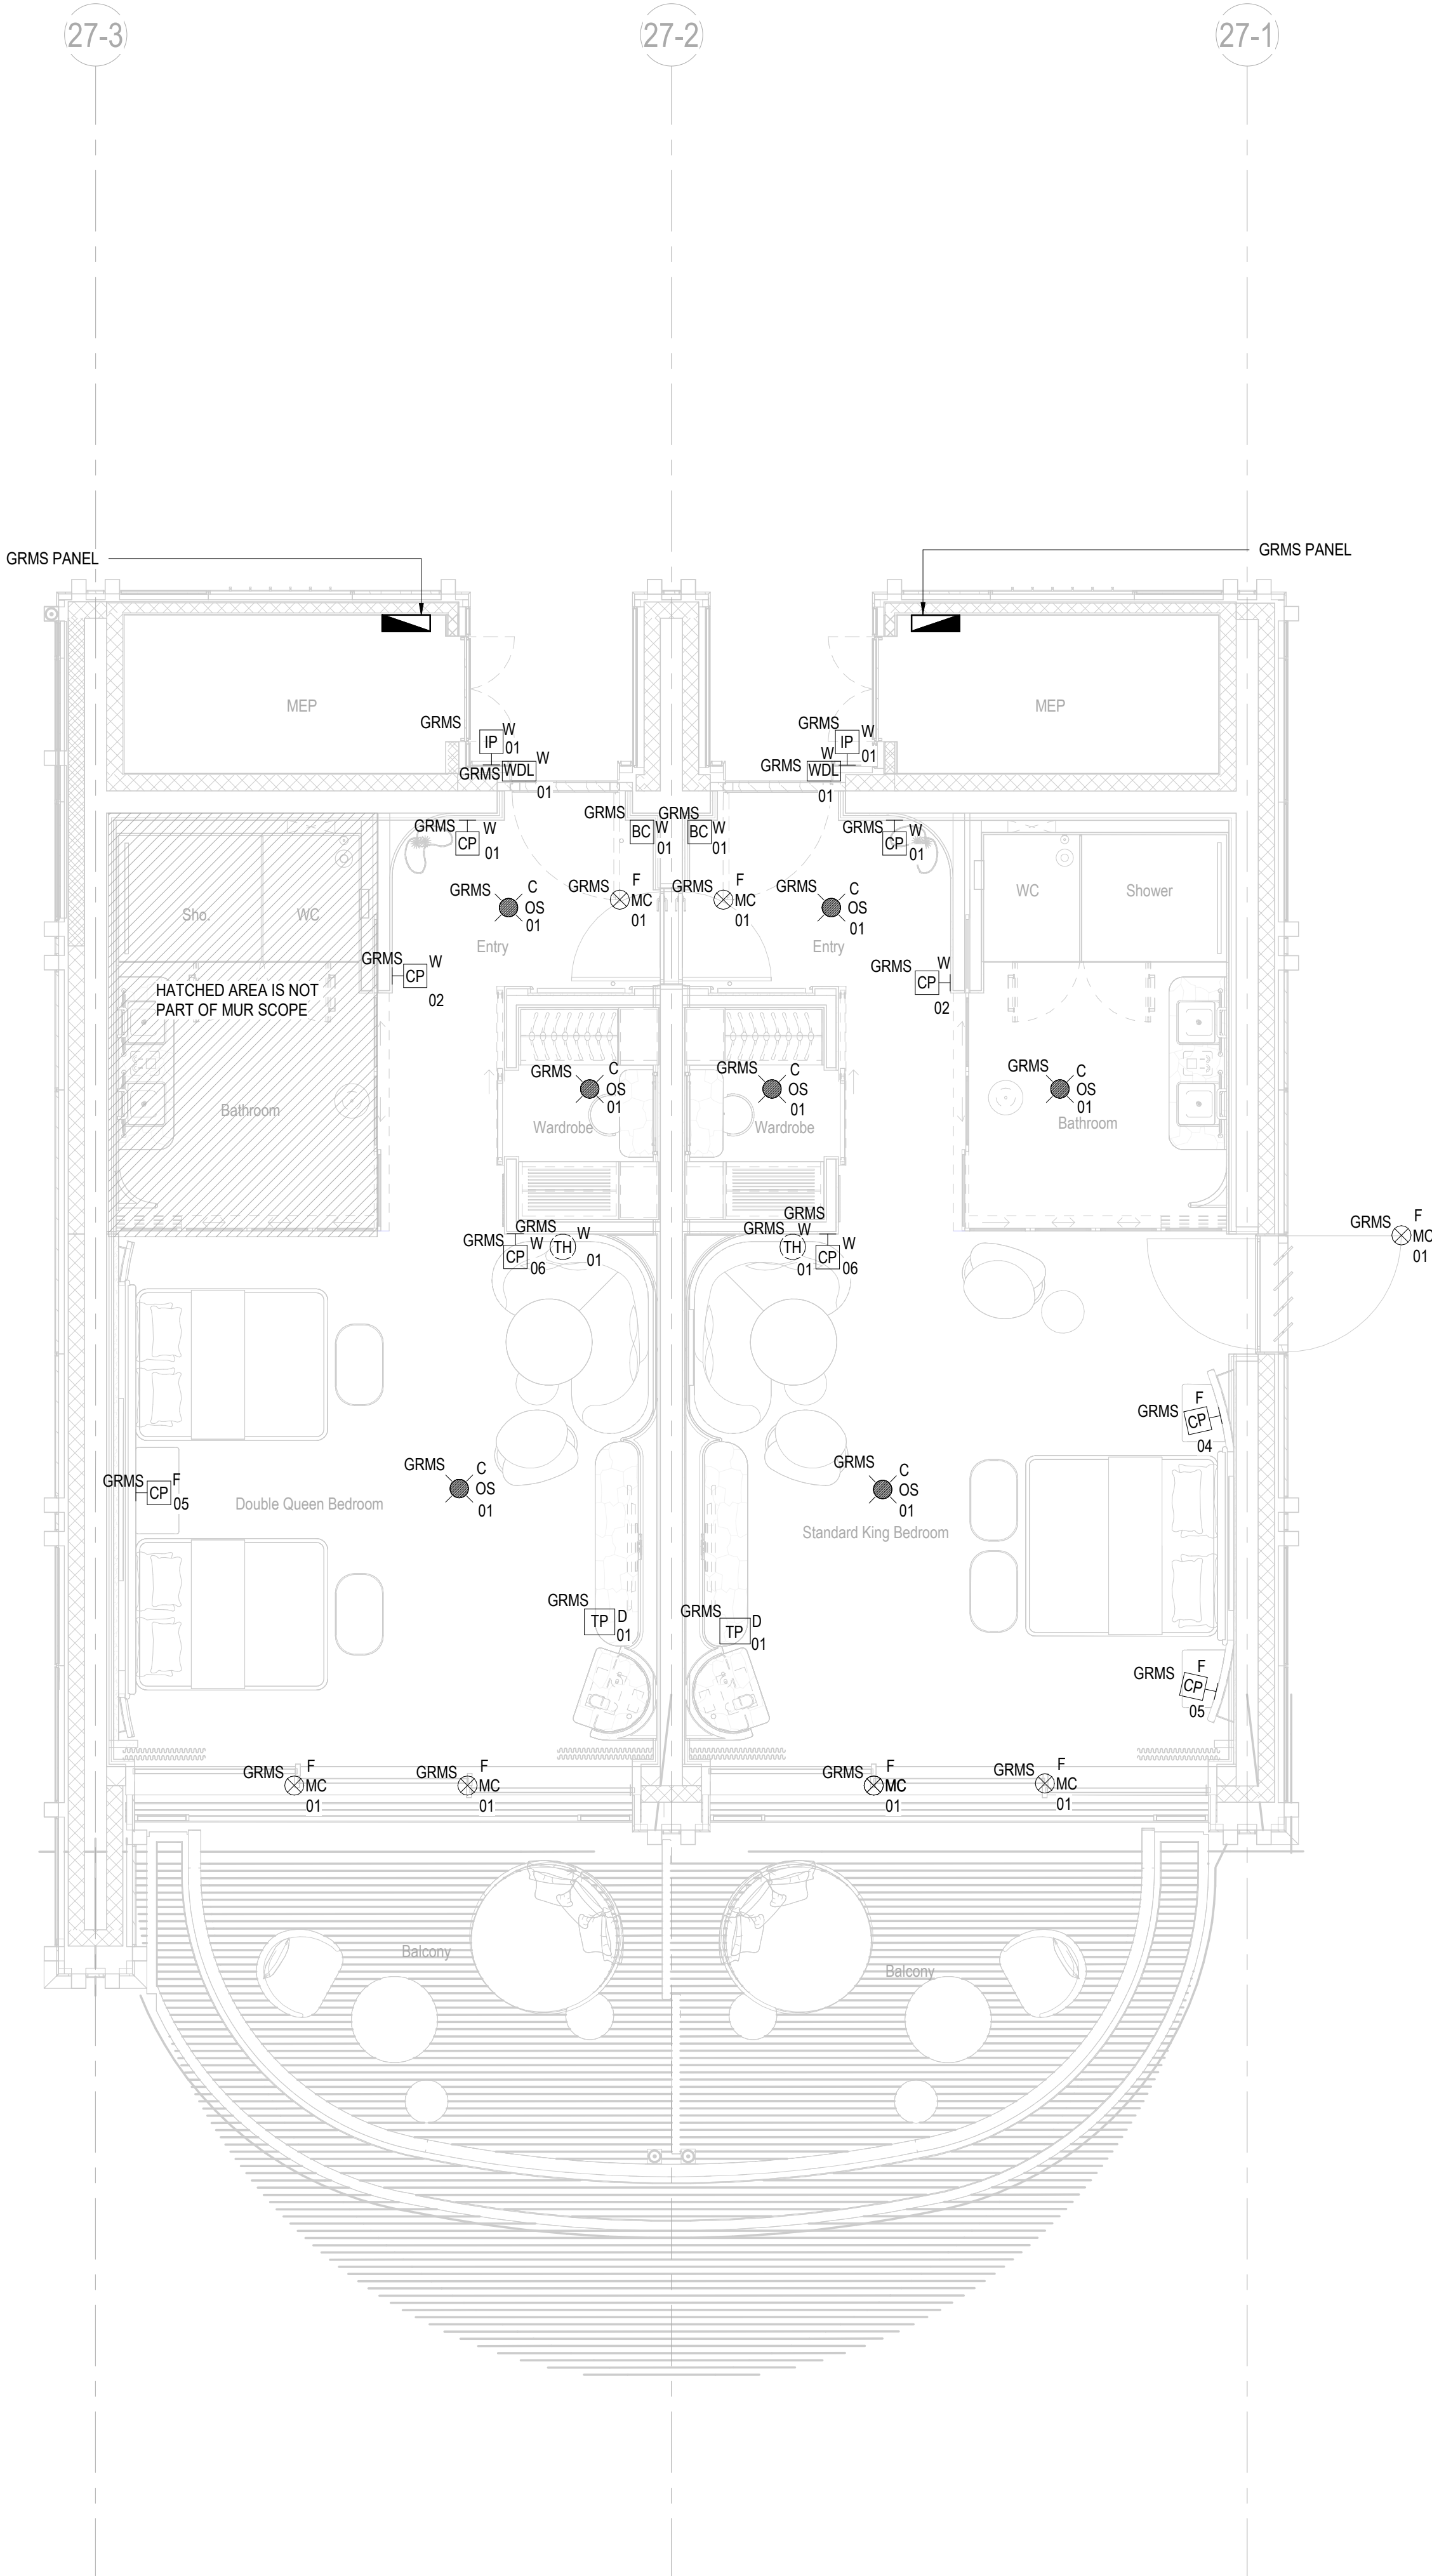

Makkah

